


## MGR040-□F Series



### ▲ Features

- Universal AC input/full range
- Protections: short circuit/overload/over voltage
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- LED indicator for power on
- No load power consumption < 0.75W
- 100% full load burn-in test
- 3 years warranty

### ▲ Model Encoding

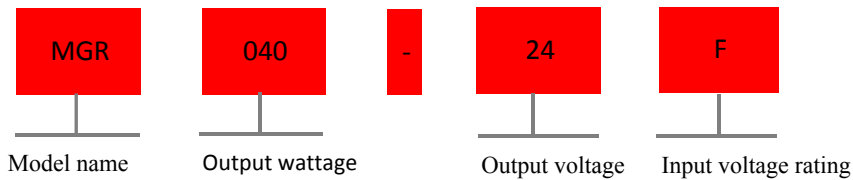

## Specification

Input				
Voltage range	85-264VAC 120-370VDC			
AC current	1.1A/115VAC 0.7A/230VAC			
Frequency range	47-63Hz			
Inrush current (max)	Cold start: 30A/115VAC 60A/230VAC			
Output				
DC voltage (V)	5V	12V	24V	48V
Efficiency	78%	86%	88%	88%
Rated Current (A)	6A	3.33A	1.7A	0.83A
Rated power(W)	30W	40W	40.8W	39.8W
Voltage ADJ.range	5-6V	12-15V	24-30V	48-56V
Ripple & noise(max ) Note.2	80mVp-p	120mVp-p	150mVp-p	200mVp-p
Voltage tolerange Note.3	±2%	±1%	±1%	±1%
Line regulation	±1%	±1%	±1%	±1%
Load regulation	±1%	±1%	±1%	±1%
Setup, rise time Note.4	500ms 30ms/230VAC 500ms 30ms/115VAC(at full load)			
Hold up time	50ms/230VAC 20ms/115VAC(at full load)			
Status indicator	Green LED			
Protection				
Overload	105%-150% rated output power			
	Protection type: Constant current limiting, recovers automatically after fault condition is removed			
Over voltage(V)	6.25-7.25V	15.6-18V	31.2-36V	57.6-64.8V
	Protection type: Shut down O/P voltage ,re-power on to recover			
Safety and EMC				
Withstand voltage	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
Isolation resistance	I/P-O/P,I/P-FG,O/P-FG :100M Ohms/500VDC/25℃/70 % RH			
Safety standards	60950-1、GB4943.1			
EMC emission	Compliance to EN55011, EN55032(CISPR32)EN61204-3 Class B,EN61000-3-2,-3			
EMC immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024,EN61000-6-2,EN61204-3.heavy industry level, criteria A			
Environmental				
Working temperature	- 20~+70 ℃ (Refer to "Derating curve ")			
Storage temperature	- 40~+85℃			
Storage humidity	10-95 % RH			
Vibration	Component:10-500Hz,2G 10 min/1cycle, 60 min each along X,Y,Z axes			
Others				
Mean time between failure	301.7K hrs min MIL-HDBK-217F(25℃)			
Installation	Install on DIN rail TS35			
Protection class	IP20			
Weight	0.32kg			
Length*width*height	90*40*100mm			
Data	Details		Model name	
	MGR 30W 6A/5V		MGR040-05F	
	MGR 40W 3.33A/12V		MGR040-12F	
	MGR 40.8W 1.7A/24V		MGR040-24F	
	MGR 39.8W 0.83A/48V		MGR040-48F	

